


Software CU-EX1

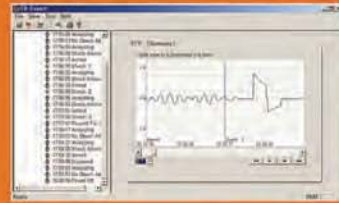

- Patient and Data Management Software
- Easy Data Communication between PC and Product (SD card, IrDA)
- Records ECG Data and Voice
- Easy Printing by all kinds of Printers
- Data Communication with i-PAD, Paramedic, Lifegain

CU-EX1 displays ECG data on the computer after receiving the data from i-PAD, Paramedic, Lifegain. If you use CU-EX1, you are able to analyze, record and manage ECG data of the patients more efficiently.

Intelligent PATIENT INFORMATION & CARE

Method



Method to connect SD card for wireless communication



Method to connect IrDA cable for wireless communication



Head Office
221, Anyangpangyo-ro, Uiwang-si, Gyeonggi-do, Korea
Tel : +82 31 421 9700 Fax : +82 31 421 9911 email : admin@cu911.com

Plant
130-1, Dongwhagongdan-ro, Munmak-eup, Wonju-si, Gangwon-do, Korea
Tel : +82 33 747 7657 Fax : +82 33 747 7659

CU Medical Germany GmbH
Ernst-Augustin-Str. 5-11, 12489 Berlin, Germany
Tel : +49 30 6781 7804 Fax : +49 30 6782 0901

CU Medical Systems Japan Corporation
8F Toranomon Sakurada-Dori Bldg. 1-2-10 Toranomon, Minato-ku, Tokyo, Japan
Tel : +81 3 6205 7385 Fax : +81 3 6205 7386

EU Authorized Representative
Medical Device Safety Service, Schiffgraben 41, 30175 Hannover, Germany
Tel : +49 511 6262 8630 Fax : +49 511 6262 8633

<http://www.cu911.com>  0470



CU Medical Systems, Inc.

Company Overview

CU Medical Systems, Inc. is a high-technology medical device company that designs, develops, manufactures, and markets medical devices centered around one common characteristic: Intelligence

Mission

Our missions for our range of intelligent resuscitation and monitoring devices to become the standard tool for health and emergency organizations in their quest to save and preserve more lives.

Product Lines



This is our line intelligent Public Access Defibrillators that are designed for the general public who may be the first on the scene of a cardiac arrest. These devices come with simple and straightforward user interfaces-perfect for the general public that seldom use defibrillators.

Paramedic

This is our line of intelligent patient care devices that consist of defibrillators designed for advance users such as emergency responder and health care organization personnel. These devices are light-weight and easy to use-perfect for rescuers in and out of the hospital.

LIFEGAIN

These defibrillators are designed for hospital use. These may run either in Manual or AED mode. Aside from defibrillation capability, these devices usually come integrated with physiological monitors such as 12-lead ECG and SpO₂. These features make this kind of defibrillators suitable for use by physicians inside a hospital.

Quality Credentials

Corporate Quality Policy

Since we design, develop, manufacture, sell and service our brand-new Paramedic series and AED and other products as well, we put a lot of importance on the quality of our products and services. It is our way of showing to our partners and customers not only concern for safety and reliability but also our belief that quality is the key for long term success in business.

- Do it right the first time to eliminate costly rework
- Listen to and learn from customers and employees
- Make Continuous improvement an everyday matter
- Build teamwork, trust, and mutual respect

Quality Assurance

CU Medical Systems, Inc. continuously encourage quality improvement through Total Quality Management to consistently improve the safety and reliability of our products as well as quality systems. With these perspectives, CU Medical Systems, Inc. strives to comply with the rigorous quality system regulations of the following organizations:

- ISO 13485 - 2003 (Europe) (with yearly inspections) - EN46001 (Europe)
- Medical Device Directive (MDD 93/42/EEC) (Europe)
- Conformance Europeen (CE MARK) labeling
- KFDA Quality Approval (Korea)
- JFDA Approval (Japan) -Paramedic CU-ER1, i-PAD NF1200, CU-SP1
- FDA Approval (US) - iPAD NF1200
- SFDA (China) : i-PAD NF1200, LifeGain CU-HD1
- British Heart Foundation : i-PAD CU-SP1

Quality Achievements

It is gratifying when quality achievements come with official recognition from outside entities. In the past years, CU Medical Systems, Inc. has achieved and been honored with the following:



Excellent Korean Technology Mark (KT MARK) (June 11, 2003)
Development of automatic external defibrillator by utilizing entropy arrhythmia analysis algorithm
Ministry of Science Technology



Excellent Machinery, Mechanism Materials Mark (EM MARK) (Aug 30, 2003)
ATS (Agency for Technology and Standards)
Ministry of Commerce, Industry Energy



Certificate of Excellent Quality Product (Oct 30, 2003)
Public Procurement Service, Republic of Korea



Won the 4th SMBA technological innovation prize for AED (Sep 24, 2003)
Small Medium Business Administration



Health Industry Technologies Exposition Korea 2003 Award (Dec 4, 2003)
Korea Health Industry Development Institute



Korean World-class Product Award 2005 (June 30, 2005)
Ministry of Commerce, Industry Energy



Leading company of regional Innovation Award 2005 (Oct. 5, 2005)
The Prime Minister, Presidential Committee on Balanced National Development.



IR52 Jang Young Shil Award 2008 (May 20th, 2008) : iPAD NF 1200
Korea Industrial Technology Association

i-PAD CU-SP1 (Semi-Automated with 150J)

i-PAD CU-SP1 Plus (Semi-Automated with 200J)

i-PAD CU-SP1 Auto (Fully Automated with 150J)

(Intelligent Public Access Defibrillator)
Defibrillation capability for the general public



Key Features

- Ambient noise detection(Auto volume adjusting)
- CPR detection
- Pads and battery status indicator
- Multi events recording
- Easy communication with CU-EX1 software
- Low cost of ownership

Specifications

DEFIBRILLATOR

- Model : IPAD CU-SP1
- Standard Package : Defibrillator, Pads, Battery, Manual
- Output Energy : Adult-150Joules / Pediatric-50Joules(Common usage)
- Charging Time
Charging time : Less than 10 seconds
Charging time after CPR finished : At least 6 seconds

User Interface

- User Support : Detailed voice prompts and flashing indicators
- CPR guidance : Voice prompts for how to perform CPR for adult and child patient
- Controls : On/Off button, I button, Shock button
- Indicator : LCD display(Device status, Battery status, Pads status)
- Sensing : Pads expiring date, Pads connection status
- CPR monitoring
- Automatic Volume adjusting

Environment

- Sealing :
Waterjet proof IPX5 per IEC60529(IP55)
Dust protected IP5X per IEC60529
- Temperature : Operation/Standby (0 - 43°C)
- Vibration : Meets MILSTD 810G

Data Recording and Transmission

- IrDA port : Wireless transmission of event data to PC, SD card
- Internal Memory : ECG, Event
- Storage Capacity : Multi Recording 5 events / Max 3 hours
- Data Review PC Program : CU-EX1

Patient Analysis System

- Patient Analysis : Shockable rhythms (Ventricular Fibrillation, Ventricular Tachycardia)
- Sensitivity/Specificity : Meets AAMI DF80 Guideline

Battery

- Standard Capacity : - Type : DC 12 volt 2.8Ah, Lithium manganese dioxide
- Capacity : Minimum 50 shocks(150J)
- High Capacity : - Type : DC 12 volt 4.2Ah, Lithium manganese dioxide
- Capacity : Minimum 200 shocks(150J)
- Lifespan : 5 years (high capacity battery)
(With the condition of the temperature of operation/standby, standby mode after the first initial check)



- Size : 260 × 256 × 69.5 (W × L × H, mm)
- Weight : 2.4kg

Parts & Accessories

Standard Package

- Device
- Multifunction Defib. Pads
- Disposable LiMnO₂ Battery Pack
- User's Guide

Option

- Carrying case
- SD card
- Software for data management with key file
- Wall bracket - Wall cabinet



CU-SP1 Trainer

- 8 Standard rescue scenarios
- Powered by AAA disposable, rechargeable battery
- Simulates all the functions of CU-SP1



Auto volume adjusting, upto 90db
Ambient noise detector measures level of background noise and adjusts the volume of the voice prompts accordingly.



Smart pads storage, underneath the device
Integrated pad storage
- electrode pads are stored, pre-connected, in a clear compartment on the underside of the unit.



Smart CPR detection
- If CPR is not being performed, voice prompts encourage the responder to 'perform CPR'
- If CPR is being performed, voice prompts encourage the responder to 'continue CPR'



Easy communication
- Internal memory stores the last 5 events/3 hours of data
- Data can be transferred via the built in SD card and IrDA ports



Patient mode switch
- Easily switch from Adult to Child mode without changing pads
- Safety cover prevents accidental switching

i-PAD CU-SP2

(Intelligent AED for professional use)

Key Features

- Manual Override, R-Sync function
- Graphic LCD status indicator
- Wireless ECG transmission device
- External Bluetooth Printer
- Ambient noise detection(Auto volume adjusting)
- Easy communication with CU-EX1 software

Specifications

DEFIBRILLATOR

- Model : IPAD CU-SP2
- Output Energy :
AED Mode : Adult-150/200J(fixed) or 150-200J, 150-150-200J(Energy Escalating)
Manual Mode : 2-200J, R-Sync
- Charging Time
Charging time : Less than 10 seconds
Charging time after CPR finished : At least 6 seconds

User Interface

- User Support : Graphic guide, Detailed voice and text prompts
- CPR guidance : Voice prompts for CPR for adult and child patient
- Controls : On/Off button, I button, Shock button, 3 Menu buttons
- Indicator : Graphic LCD display (Device status, user's guide, ECG, heart rate, etc.)
- Sensing : Pads expiring date, Pads connection status, Pads usage detecting
- ECG monitoring
- CPR monitoring
- Automatic Volume adjusting

Environment

- Sealing :
Waterjet proof IPX5 per IEC60529(IP55)
Dust protected IP5X per IEC60529
- Temperature : Operation/Standby(0 ~ 43℃)
- Vibration : Meets MILSTD 810G

Data Recoding and Transmission

- Internal Memory : ECG, Event
- IrDA : Wireless transmission, SD card
- Storage Capacity : Multi Recording 3 events(up to 17 hours for each event)
- Bluetooth : Printer or CU-EM1
- Data Review : CU-EX1

Patient Analysis System

- Patient Analysis : Shockable rhythms (Ventricular Fibrillation, Ventricular Tachycardia)
- Sensitivity/Specificity : Meets AAMI DF80 Guideline

Battery

- Rechargeable : - Type : 11.1V DC, 1.9Ah Li-ion
- Capacity : Minimum 60 shocks or 3 hours of operation
- Disposable : - Type : 12V DC, 4.2Ah LiMnO2
- Capacity : Minimum 130 shocks or 5 hours of operation



- Size : 260×256×69.5(W×L×H,mm)
- Weight : 2.4kg

Parts & Accessories

Standard Package

- Device
- Multifunction Defib. Pads
- Rechargeable Battery Pack
- Battery Charger
- User's Guide

Option

- Carrying case
- SD card
- Printer
- CU-EM1 (ECG Transmission Device)

DEVICE SETUP	DATA REVIEW	EXIT
Device Mode	Manual Mode	
Manual Override	CHARGE	
Adult / Pediatric Mode	ADULT	
Shock Energy	Escalating(150-150-200J)	
ECG Gain	10mm/mV	
Device Volume	1	1/2
Graphic Indication	ON	

Manual Mode

When in manual override, the user can set the energy value for defibrillation. Using R-Sync will detect the R-wave of the patient's ECG, and display the R-Sync mark on the LCD Screen with a short beep.



Wireless ECG transmission device(CU-EM1)

In Monitor Mode, the i-PAD CU-SP2 uses Bluetooth to receive ECG data from the CU-EM1 and displays it on the LCD Screen.



Printer

The i-PAD CU-SP2 supports connection to an external Bluetooth printer

i-PAD NF1200 (Semi-Automated)

i-PAD NF1201 (Fully-Automated)

(Intelligent Public Access Defibrillator)
Defibrillation capability for the general public

Key Features

- Patented *e-cube* Biphasic Truncated Exponential Shock Waveform
- Automatic Self-testing
- CPR coaching
- Multi event recording
- Pads status detection
- Simple operation
- LED status indicator

Technical Specifications

DEFIBRILLATOR

- Model : NF1200 - Operation : Semi-Automated (NF1200), Fully-Automated (NF1201)
- Waveform : Biphasic Truncated Exponential - Energy : 200J (Fixed)
- Shock-to-Shock Cycle Time : Typically less than 20 seconds
- Protocol : Voice prompts and indicators guide user through protocol.
Follow preconfigured settings. Can be modified with software
- Voice Instructions : Detailed voice messages guide responder through use of the defibrillator
- Controls : Shock Button (NF1200 only), i-Button, On/off Button
- Indicators : 4 LEDs (different colors), i-Button

ENVIRONMENTAL / PHYSICAL REQUIREMENTS

- Temperature : Operating : 32° - 110° F (0° - 43°C)
Standby : 32° - 110° F (0° - 43°C)
- Humidity : Operating - 0% to 60% relative, non-condensing
Standby - 0% to 95% relative, non-condensing
- Vibration : Meets EN1789 random and swept sine, road ambulance specification
in operating and standby states
- EMI (Radiated/Immunity) : Meets EN55011 Group 1 Level B Class B and EN61000-4-3

Sealing

- Meets IEC60529 class IP54 with battery installed

BATTERY

- Type : 12 Volt DC, 4.2 Ah, lithium manganese dioxide, disposable long-life primary cell
- Capacity : Minimum 200 shocks or 4 hours of operating time (25°C)

AUTOMATED AND USER-ACTIVATED SELF-TESTS

- Daily Self-Tests : Tests internal circuitry, waveform delivery system, battery capacity and software
- Battery Insertion Test : Upon battery insertion, extensive automatic self-tests and user-interactive test check device readiness

Data stored

- Maximum 7 events can be saved.
- 1 event can be recorded for 75 minutes
- If 7 events are recorded, maximum recording duration for each event is 5 minutes



- Size : 220×281×82 (W×L×H, mm)
- Weight : 2.2kg

Parts & Accessories

Standard Package

- Device
- Multifunction Defib. Pads
- Disposable LiMnO₂ Battery Pack
- User's Guide
- Quick Reference Card

Option

- Carrying case
- IrDA connector for data communication
- Software for data management with key file
- Wall bracket - Wall cabinet

TRAINER



i-PAD NF1200 T1

- 8 standard Rescue Scenarios
- Infrared remote control operation
- Powered by an external disposable battery pack or rechargeable battery pack
- Simulates all the functions of the NF-1200


i-PAD NF1200 T2

- 8 standard Rescue Scenarios
- Powered by AA Battery
- Function Switch
- Simulates all the functions of the NF-1200



Pads Connector Guide & LEDs

- Indicates the position of the pads connector
- Guide the user during rescue operation



Shock Button (NF1200 only)

- Delivers the shock



Information Button

- When pressed, guides the user
- during CPR and system trouble shooting



State LED

- Indicates operational state of the device



Battery Pack

- Disposable LiMnO₂ Battery Pack



IrDA Port

- Used for data communication

LIFEGAIN CU-HD1

(Multifunction Defibrillator / Monitor)

Someone goes down in cardiac arrest, resuscitation is just a hand away...



Specifications

Display

- LCD Dimensions : 7 inch Diagonal (152mm * 91mm)
- Type : TFT Color
- Resolution : 800 * 480 pixels

Defibrillation

Defib Common

- Waveform : Truncated Exponential Biphasic (e-cube)
- Charge Time : Adapter : Less than 5 seconds to 200 Joules
Battery : Less than 5 seconds to 200 Joules

AED Mode

- Output Energy : 200J
- Shock Delivery : Via multifunction defib electrode pads
- AED Develop Guideline : Shock advisory sensitivity and Specificity meet AAMI DF-80 guidelines
- Voice & Text Prompts : Guide the user through the protocol via multifunction defib electrode pads

Manual Mode

- Output Energy : 1-10J, 15J, 20J, 30J, 50J, 70J, 100J, 120J, (Selected) 150J, 170J, 200J
- Shock Delivery : External paddle (with Pediatric) / Internal paddle
- Synchronous Cardioversion

Printer

- Continuous ECG Strip : Real-Time (8 seconds delay)
- Auto Printing : Recorder can be configured to print marked event, charge, shock and alarms
- Printing Speed : 25mm/s
- Paper : 50mm Width / 40mm Diameters

Automatic Self-Test

- Power On Self-Test
- Run Time Self-Test
- Manual Self-Test
- Periodic Self-Test (Daily / Weekly / Monthly)

Data Storage

- External memory card
- : SD Card (ECG data, Event, Voice)

ECG Monitoring

- Input : 3-Lead Cable : I, II, III
- 5-Lead Cable : I, II, III, aVR, aVL, aVF or V
- 10-Lead Cable : I, II, III, aVR, aVL, aVF or V1, V2, V3, V4, V5, V6
(Display View : All 12-Lead ECG waves display simultaneously)
- Lead Fault : "Lead Fault" message and dashed line display, if an electrode or lead wire becomes disconnected
- Heart Rate Display : 30 to 300 bpm (± 3 bpm)
- ECG Size : 5, 10, 20mm/mV and Auto-gain
- Heart Rate/Arrhythmia Alarm : HR, Asystole, VF, VT

Power Source

- External Battery Pack : Lithium Polymer**
- Type : 14.8V 3.1Ah (Rechargeable)
- Capacity : When new, minimum of 100 shock deliveries (200J)

AC Power Pack

- Output : 18V, 6A

Noninvasive Pacing

- Waveform : Monophasic Truncated Exponential
- Mode : Demand and Fixed Mode
- Amplitude Accuracy : 0 ~ 200mA (± 5 mA)
- Pulse Width : 20ms (± 1.5 %)
- Pulse Rate : 30 ~ 180ppm (± 1.5 %)
- Refractory Period : 340 msec (30 to 80 ppm)
240 msec (90 to 180 ppm)

SpO₂ Pulse Oximetry

- Saturation : 70 ~ 100% (± 3 digits)
- Pulse Rate : 20 ~ 250 bpm (± 3 bpm)
- Perfusion : 0.2%
- Module Manufacturer : Nellcor
- SpO₂ Alarm : Less than Minimum setting rate
Over than Maximum setting rate

NIBP

- Patient Population : Adult, Pediatric, Neonate
- Method : Oscillometric
- Control : Automatic and manual measurements
- Auto Intervals : 1, 3, 5, 10, 15, 30, 60, 120 min
- Displayed Pressures : Systolic, Diastolic, MeanmmHg
- Displayer Units : Adult : 40 to 260 mmHg
Pediatric : 40 to 160 mmHg
Neonate : 40 to 130 mmHg
- Systolic Range : Adult : 20 to 200 mmHg
Pediatric : 20 to 120 mmHg
Neonate : 20 to 100 mmHg
- Diastolic Range : ± 3 mmHg
- Pressure Transducer : Adult : 300 mmHg
Accuracy Pediatric : 300 mmHg
Neonate : 150 mmHg
- Redundant Circuit Overpressure Limit

EtCO₂

- Range : 0 ~ 99 mmHg
- Accuracy : $\pm (1.5 \text{ mmHg} + 2 \% \text{ of gas level})$
- Respiration Range : 0 ~ 150 bpm
- Respiration Rate Accuracy : ± 1 bpm
- Sampling Flow Rate : 50 ± 10 ml/min
- Typical Response Time : < 1 sec (IRMATM), < 3 sec (ISATM)

Key Features

- Efficient and e-cube Biphasic Biphasic technology (BTE Type)
- Manual and AED operation
- Defibrillation using paddles, pads or internal paddles
- ECG Monitoring (3-Lead ECG / 5-Lead ECG / 10-Lead ECG)
- SpO₂ pulse oximetry with alarms (Nellcor)
- Noninvasive pacing mode
- NIBP (Non-Invasive Blood Pressure)
- EtCO₂ (End-Tidal CO₂)



- Size : 318×208×355 (W×L×H, mm)
- Weight : 6kg (with external paddle)



Parts & Accessories

Standard Package

- Device
- External Paddle (Adult, Pediatric)
- 3 Lead ECG cable
- ECG electrodes
- Defi pads & Adaptor
- Built in printer
- Power cord & SMPS
- Internal Battery
- Gel
- User's Guide

Option


- Carrying case
- SD card
- SD card reader
- Pediatric pads
- 5 Lead ECG cable
- Car cigar lighter jack
- SpO₂ Module Set
- Pacer
- 10 Lead ECG cable
- NIBP (Non- Invasive Blood Pressure)
- EtCO₂ (Mainstream / Sidestream)
- Software for data management (CU-EX2)

X-CPR

X-CPR (Simultaneous Sterno Thoracic CPR System)

Key Features

- Simultaneous Sterno Thoracic CPR (SST-CPR) system
- Air powered consistent compressions
- 4 simple application steps

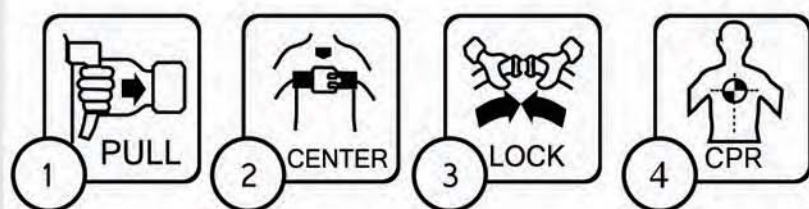

- 5 steps adjustable compression depth
- Combinable with ambulance stretcher
- Compression Frequency : 100times per min

Specifications

• Input

- Range of Input Oxygen Pressure : 3.5 ~ 6.3kg/cm²
- Relief Valve Operation Pressure : 9kg/cm²
- Medical Grade Hyperbaric Oxygen

• Ventilation

- Range of Volume Control : 240 ~ 700ml
- Inspiration Period : 1.0sec (fixed)
- Relief Valve Operation Pressure : 55 CmH₂O

• Compression

- Compression Frequency : 100 compressions per minute
- Compression Depth : 0~5cm
- Compression Modes : 30:2 / Continuous compression


• Physical Specifications

- Size : 52cm x 45cm x 7.5cm (LxWxH)
- Weight [NWT] : 11.5kg



- Operated by remote controller
- Stop / Fasten
 - 30:2 / Continuous CPR
 - Ventilation
 - Compression Depth
 - Internal battery status

Parts & Accessories

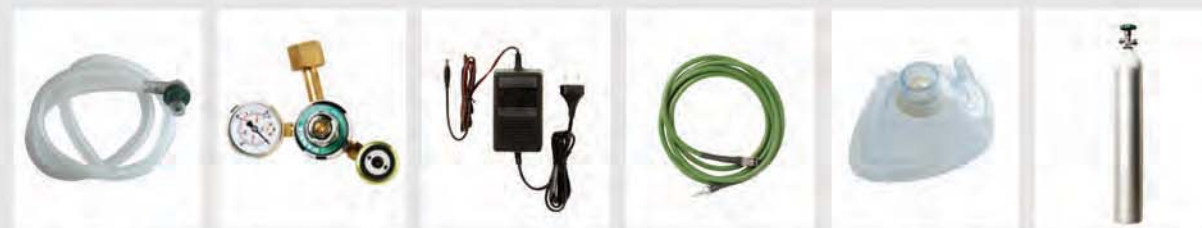

Ventilation hose

Regulator

Ac adapter

Oxygen hose

Ventilation mask

Oxygen tank
- Optional -